

COMBILOAD

Designed for efficiency and adaptability, with capabilities to carry a wide array of equipment from access platforms to heavy-duty excavators.

Specification

Available 14-32T GVW with 6-9.7m internal deck length. Heavy-duty low-profile beavertail body built with high tensile highbeam crossmembers, which are threaded through the body runners. Crossmembers spaced at nominal 300mm centres for superior point loading. Double bend beavertail section with round steel bar at each break-point for enhanced strength and ease of use.

Main body shotblasted, cleaned and then painted in two-pack paint, in customer specified RAL colour. Headboard, ramps and other steel components hot-dip galvanised for maximum protection.

All electrics fed through single gully enclosed wiring loom with sealed boxes and super seal connections, to protect wiring from corrosion and water ingress. ccc

Vehicle fully type approved with most common chassis covered under Whole Vehicle Type Approval certification



Heavy duty Angle side rave



Folded 1600mm galvanised headboard ChainLock bars to headboard Fold out worklights to headboard



FALL PROTECTION

Post & Socket fall arrest Stowage tray Access steps to front nearside



Full-width 2.5m double flip ramps



Hardwood Deck Steel mesh overlay to beavertail Galvanised steel grating to ramps



12,000lb Electric Winch



Lashing rings every 900mm

Lashing rings under side rave (only on the 32T model)




1x 1000mm plastic toolbox Recessed chain trays at front of body



E sales@sterlinggp.com W www.sterlinggp.com

OPTIONS

We offer ten additional options that are available for your Combiload truck body. Please tick \checkmark the additional options you wish to be included on your Combiload build.

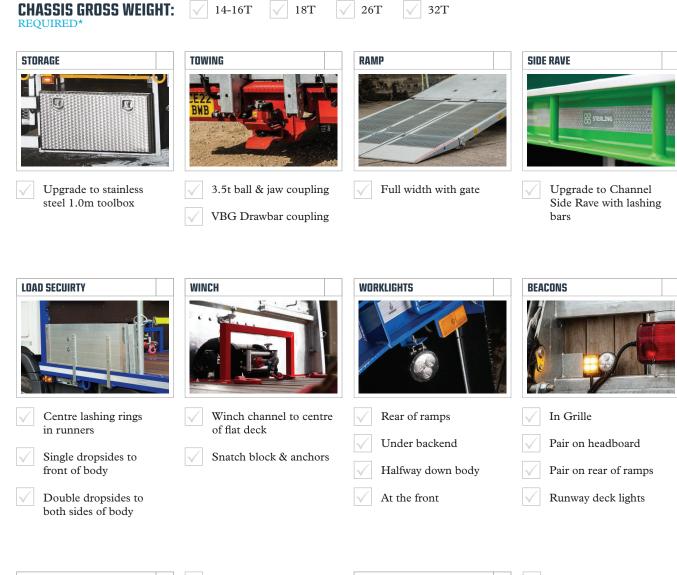



3 cones	and	storage
---------	-----	---------

- Fire Extinguisher
- Oil Spill Kit



- Wheel Chocks
- supplied with stowage
- Shovel and broom
- Mesh infill to top half

